


CreativeWEAVE

form function solution

Mira 390/20



WORLD WIDE WEAVE

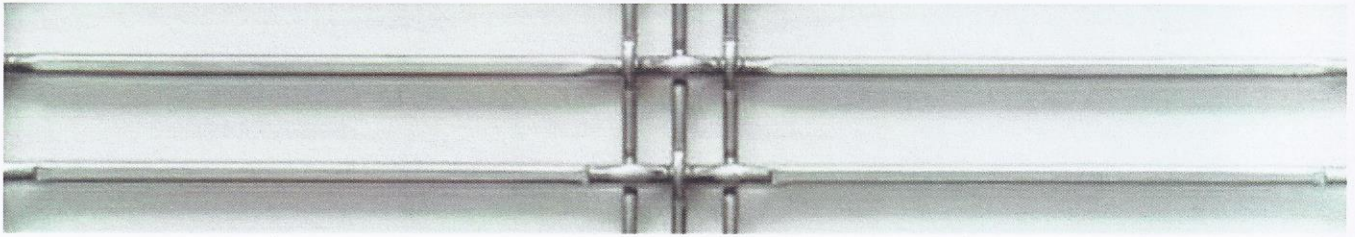

Technische Daten Technical Data Sheet / Fiche Technique / Información Técnica

Werkstoff Material / Matériau / Material	Edelstahl 1.4404 (AISI 316L) Stainless Steel / Acier inoxydable / Acero inoxidable
Freie Fläche Open area / Surface ouverte / Superficie abierta	ca. 79 %
Drahtstärke Wire diameter / Diamètre des fils / Diametro de hilos	Kettstab gekröpft: 3x2 mm Schussstab gekröpft: 3 mm precrimped wire / fil ondulé / hilo ondulado precrimped wire / fil ondulé / hilo ondulado
Teilung Kettseil Cable pitch / Entraxe câbles / Paso cables	90 mm
Teilung Schuss Weft wire pitch / Entraxe tringles / Paso trama	20 mm
Dicke Gesamtgewebe Thickness / Epaisseur / Espesor	ca. 6 mm
Gewicht Weight / Poids / Peso	ca. 3,65 kg/m ²
Maximale Gewebebreite Maximum mesh width / Largeur maximale / Ancho máximo	4 m
Maximale Gewebelänge Maximum mesh length / Longueur de tissu maximale / Longitud maxima de la tela	24 m
Standardbefestigung Standard fixing detail Fixation standard Sujeción standard	Klemmprofil Clamping profiles Profiles de serrage Perfiles de aprieto

KO & CO
Architectural Complements

KO & CO BENELUX nv.
Showroom
Boomssesteenweg 41/10
B-2630 Aartselaar
Tel. (.32) (0)3 458 40 40
Fax (.32) (0)3 458 40 00
www.ko-co.com

