




CreativeWEAVE

form function solution

PC-Tigris 80x10



WORLD WIDE WEAVE

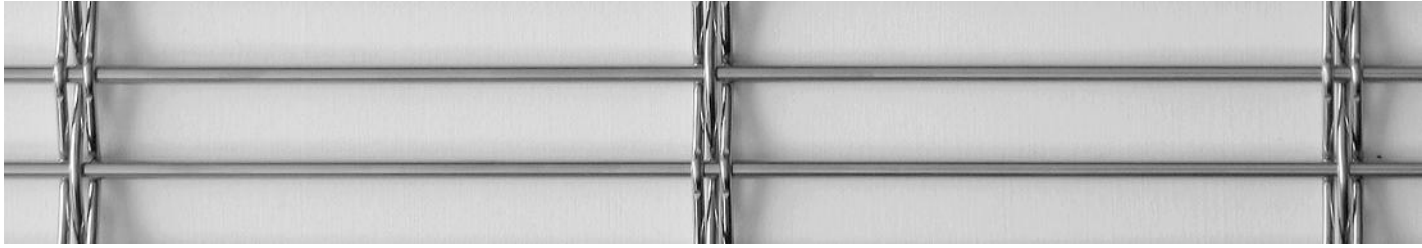

Technische Daten Technical Data Sheet / Fiche Technique / Información Técnica

Werkstoff Material / Matériau / Material	Edelstahl 1.4404 (AISI 316L) Stainless Steel / Acier inoxydable / Acero inoxidable
Freie Fläche Open area / Surface ouverte / Superficie abierta	ca. 65 %
Drahtstärke Wire diameter / Diamètre des fils / Diametro de hilos	Kettstab gekröpft: Schussstab gerade: 3x2 mm 3 mm precrimped wire / fil ondulé / Straight rod / fil droit / hilo ondulado hilo liso
Teilung Kettseil Cable pitch / Entraxe câbles / Paso cables	80 mm
Teilung Schuss Weft wire pitch / Entraxe tringles / Paso trama	10 mm
Dicke Gesamtgewebe Thickness / Epaisseur / Espesor	ca. 7 mm
Gewicht Weight / Poids / Peso	ca. 6,80 kg/m ²
Maximale Gewebebreite Maximum mesh width / Largeur maximale / Ancho máximo	4 m
Maximale Gewebelänge Maximum mesh length / Longueur de tissu maximale/ Longitud maxima de la tela	24 m
Standardbefestigung Standard fixing detail Fixation standard Sujeción standard	Klemmprofil Clamping profiles Profils de serrage Perfiles de aprieto

	<p>KO & CO BENELUX nv. Showroom Boomssteenweg 41/10 B-2630 Aartselaar Tel. (...32) (0)3 458 40 40 Fax (...32) (0)3 458 40 00 www.ko-co.com</p>
-------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------

