


CreativeWEAVE

form function solution

Square 36%



WORLD WIDE WEAVE

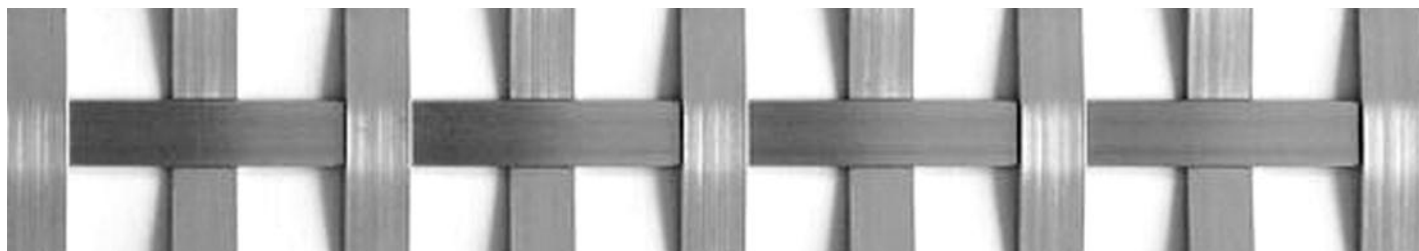

Technische Daten Technical Data Sheet / Fiche Technique / Información Técnica

Werkstoff Material / Matériau / Material	Edelstahl 1.4404 (AISI 316L) Stainless Steel / Acier inoxydable / Acero inoxidable	
Freie Fläche Open area / Surface ouverte / Superficie abierta	ca. 36 %	
Drahtstärke Wire diameter / Diamètre des fils / Diametro de hilos	Kettstab gerade : 7x1 mm Flachband Straight rod / fil droit / hilo liso	Schussstab gerade: 7x1 mm Flachband Straight rod / fil droit / hilo liso
Teilung Kettseil Cable pitch / Entraxe câbles / Paso cables	17,5 mm	
Teilung Schuss Weft wire pitch / Entraxe tringles / Paso trama	17,5 mm	
Dicke Gesamtgewebe Thickness / Epaisseur / Espesor	ca. 2,5 mm	
Gewicht Weight / Poids / Peso	ca. 6,10 kg/m ²	
Maximale Gewebebreite Maximum mesh width / Largeur maximale / Ancho máximo	4 m	
Maximale Gewebelänge Maximum mesh length / Longueur de tissu maximale/ Longitud maxima de la tela	24 m	
Standardbefestigung Standard fixing detail Fixation standard Sujeción standard	Klemmprofil Clamping profiles Profiles de serrage Perfiles de aprieto	



KO & CO BENELUX nv.
Showroom
Boomssesteenweg 41/10
B-2630 Aartselaar
Tel. (...32) (0)3 458 40 40
Fax (...32) (0)3 458 40 00
www.ko-co.com

