


TECHNICAL DATA

<i>Distance between ribbons (free wires)</i>	155,00 mm
<i>Ribbons width</i>	28,00 mm
<i>Warp wire diameter</i>	0,35 mm
<i>Weft wire diameter</i>	0,25 mm
<i>Thickness</i>	0,60 mm ca
<i>Open surface</i>	8% ca
<i>Weight (Kg/m²)</i>	1,90 ca
<i>Standard Width</i>	1.500 mm
<i>Maximum Width</i>	2.500 mm

MATERIAL

Stainless steel

All our fabrics weaved entirely with metallic wires without surface finish are incombustible (Class A1), according to the Decision 96/603/CE of the European Commission. For this class of materials it is not requested a Certificate..

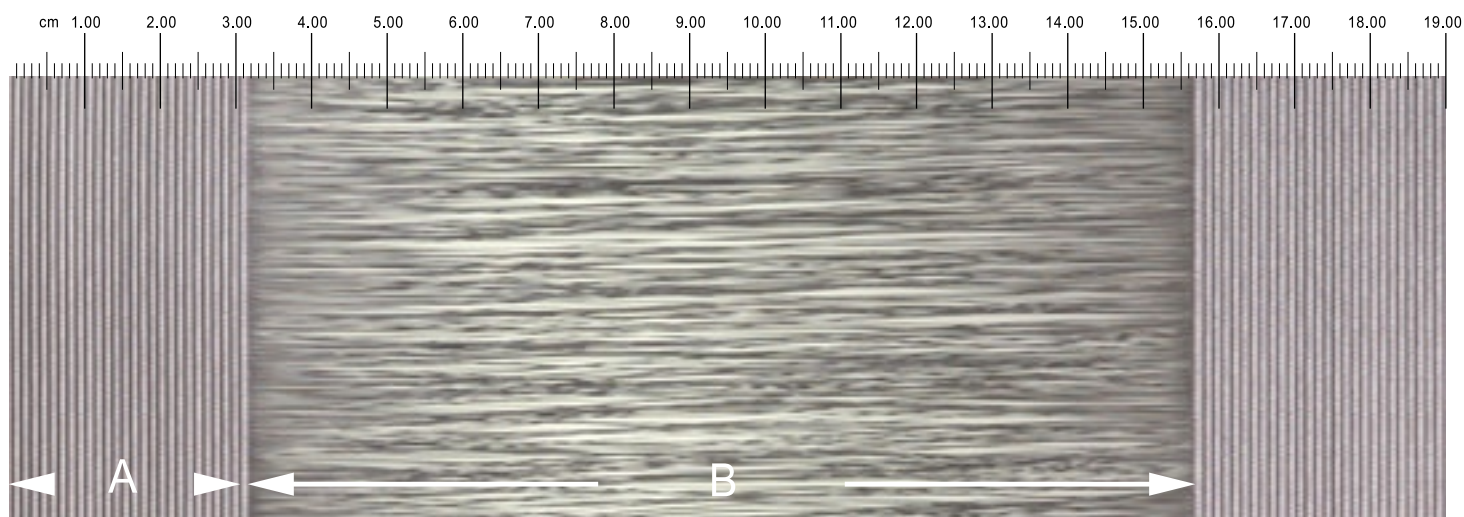

SCALA 1:1



KO & CO BENELUX nv.
Showroom
Boomssteenweg 41/10
B-2630 Aartselaar
Tel. (...32) (0)3 458 40 40
ko-co@ko-co.com
www.ko-co.com

CHARACTERISTICS

*Bands width and distance between bands can be modify by request.
For ceilings, we suggest to use skimming light.*

Applications

Ceilings, panels, furnishing, retails, sunscreen, gazebo covering.

Manufacture and fixing

*Attachment projected in size.
Welded on steel frame; closed between two frames (fixing with bi-component glue, screws or rivets).*

Maintenance

Self-cleaning and self-polishing with atmospheric rain and wind.

Main technical specifications

Low solar direct and total transmittance.

High acoustic noise reduction system.


High windbreak performance.

Aesthetical safety screen.

100% recyclable

Fire behaviour

Fireproof.

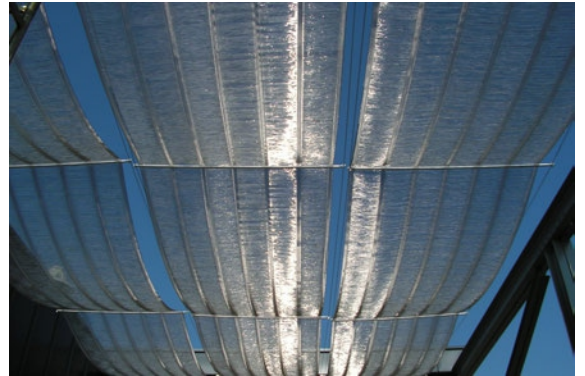

Gazebo Covering Show Room Livia Gregoretti - Milano



Retail

Piedi Nudi nel Parco - Firenze

