


FUTURA 3110

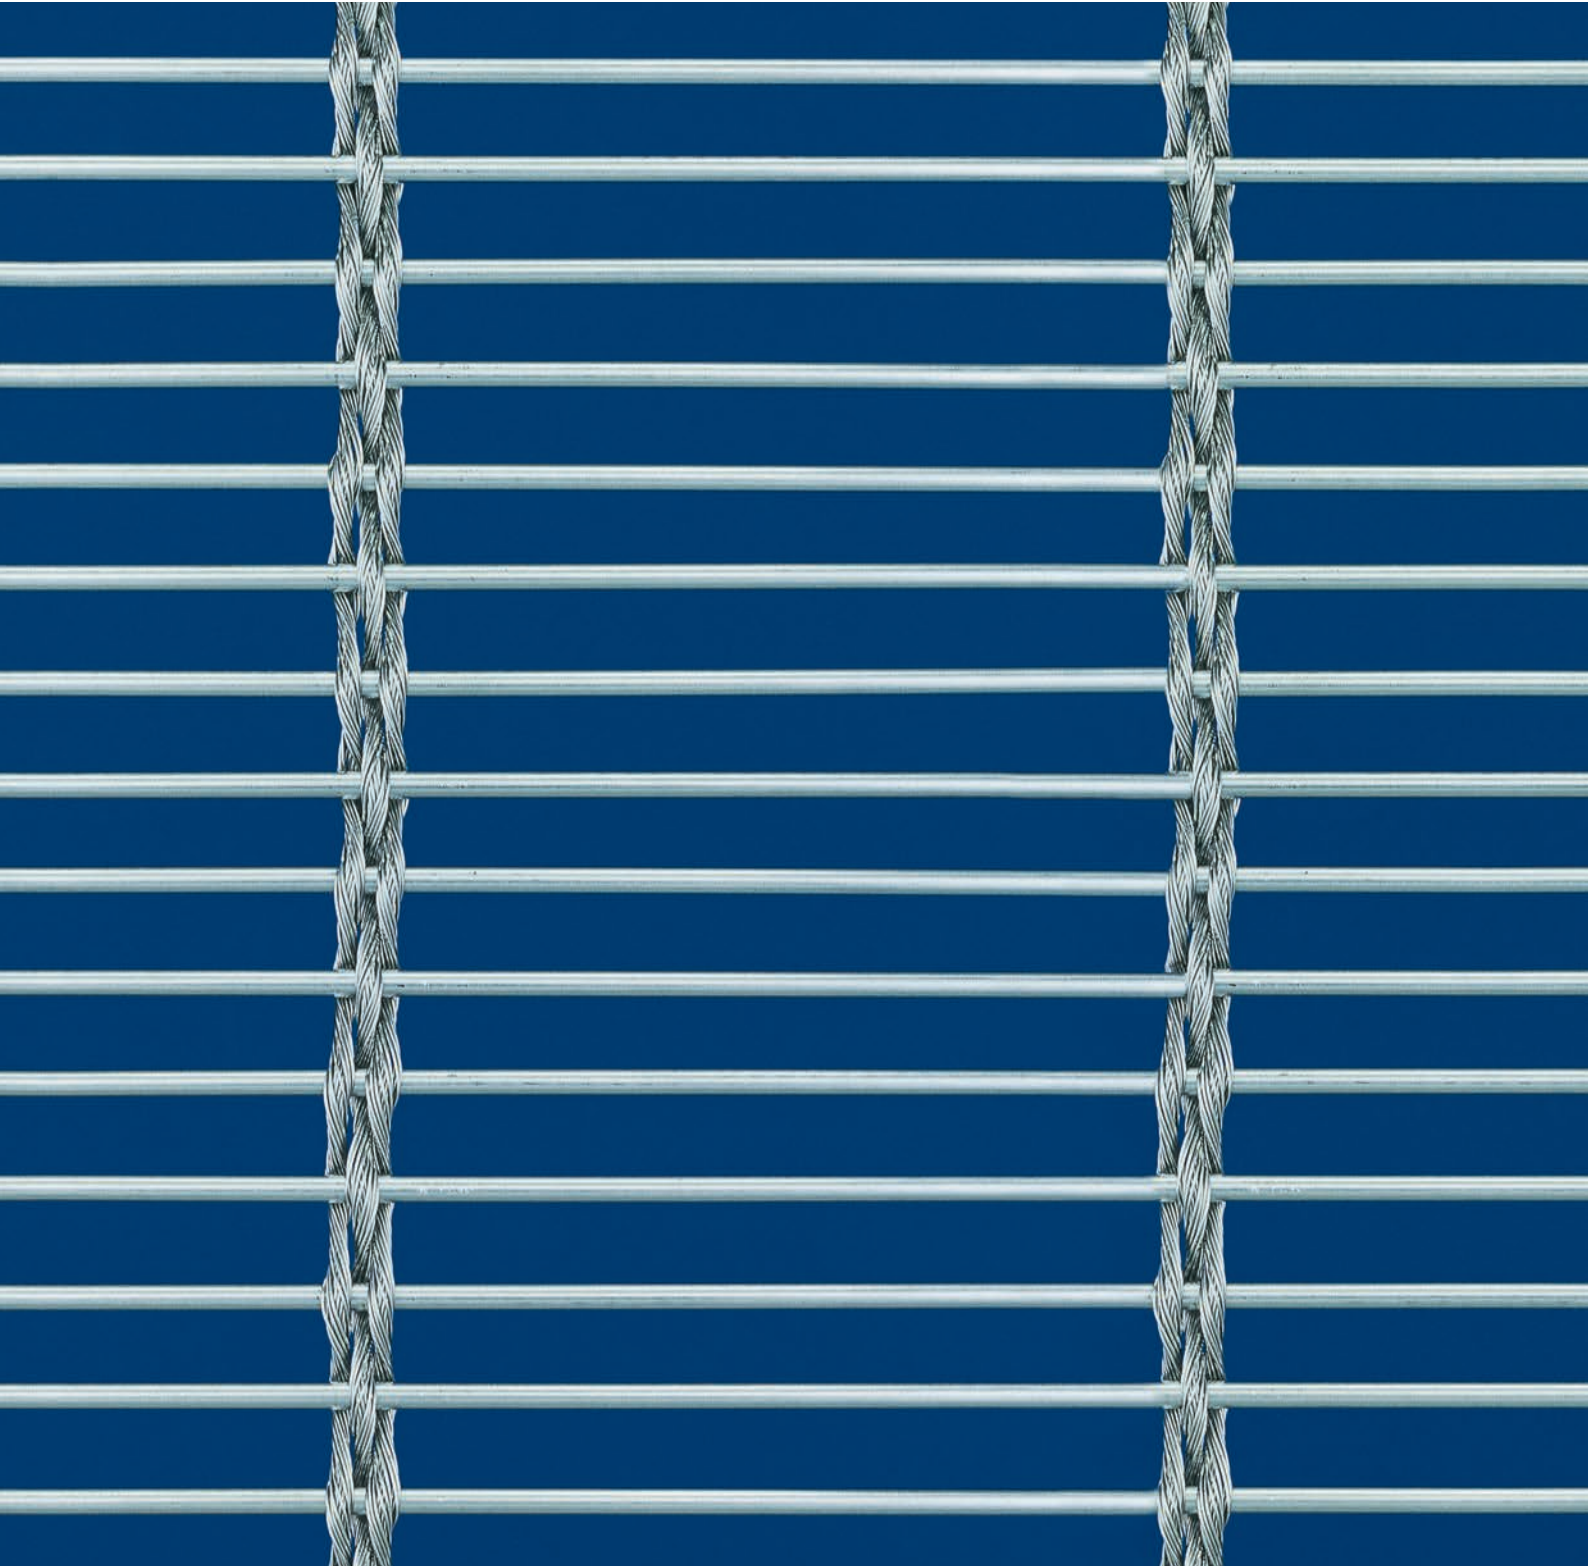

FUTURA 3110

TECHNISCHE DATEN

TECHNICAL DATA SHEET | FICHE TECHNIQUES | INFORMACIÓN TÉCNICA

| | | |
|--|---|--|
| Werkstoff Material Matériau Material | Edelstahl Stainless steel Acier inoxydable Acero inoxidable | |
| Freie Fläche Open area Surface ouverte Superficie abierta | ca. 65,9% | |
| Drahtstärke Wire diameter Diamètre des fils Diametro de hilos | Kettseilgruppe: 3 x 2,75 mm Cable Câble Cable | Schussstab: 4 mm Rod Tringle Varilla |
| Teilung Kettseilgruppe Cable pitch Entraxe câbles Paso cables | 110 mm | |
| Teilung Schuss Weft wire pitch Entraxe tringles Paso trama | 14,5 mm | |
| Dicke Gesamtgewebe Thickness Epaisseur Espesor | ca. 10 mm | |
| Gewicht Weight Poids Peso | ca. 8,5 kg/m ² | |
| Maximale Gewebebreite Maximum mesh width Largeur maximale Ancho máximo | 8 m | |
| Standardbreite Standard mesh width Largeur standard Ancho standard | 6 m | |
| Standardbefestigung Standard fixing detail Fixation standard Sujeción standard | Eingeschobene Rundstange mit Augenschrauben Inserted round bar with eye-bolts Barre incorporée au tissage avec boulons à œil Barra redonda con cerrojos | |



KO & CO BENELUX nv.
Showroom
Boomssteenweg 41/10
B-2630 Aartselaar
Tel. (+32) (0)3 458 40 40
Fax (+32) (0)3 458 40 00
www.ko-co.com

GKD – GEBR. KUFFERATH AG
Metallweberstraße 46
52353 Düren
Germany
T +49 (0) 2421 803 - 0
F +49 (0) 2421 803 - 227
creativeweave@gkd.de
www.gkd.de